

6-Axis Force Sensor K6D68 10kN/100Nm/CG

Item number: 2746



The K6D68 multi-component sensor is suitable for measuring force and torque in three mutually perpendicular axes.


The K6D68 force / torque sensor is characterized by compact dimensions at high forces and moments. It is eminently suitable for applications in robotics, e.g.

- collision detection
- "Teach-In"
- Presence or error detection
- Force- or torque-controlled operation
- Stress measurement in medical technology / prosthetics / orthopedic technology / gait analysis
- Measurements in sports medicine
- Comfort measurements / Ergonomic measurements
- Monitoring of joining and assembly processes

The evaluation of the load of force and torque takes place e.g. with a measuring amplifier GSV-8. With the freely available software GSVmulti the display, recording and export of the measurement results are possible. The calculation of the 6 load sizes is e.g. via a Windows DLL or via Labview using a provided digital calibration document. The calibration document contains the individual calibration factors and error corrections of the sensor. Due to the detailed documentation of the calculation instructions, the use of 6 measuring amplifiers with analogue output, e.g. GSV-1H, with subsequent billing of the measurement results possible.

The sensors K6D68 1kN / 20Nm and 2kN / 50Nm are made of an aluminum alloy with a stainless steel housing. The sensors from 5kN / 50Nm are made entirely of stainless steel.

Technical Drawing

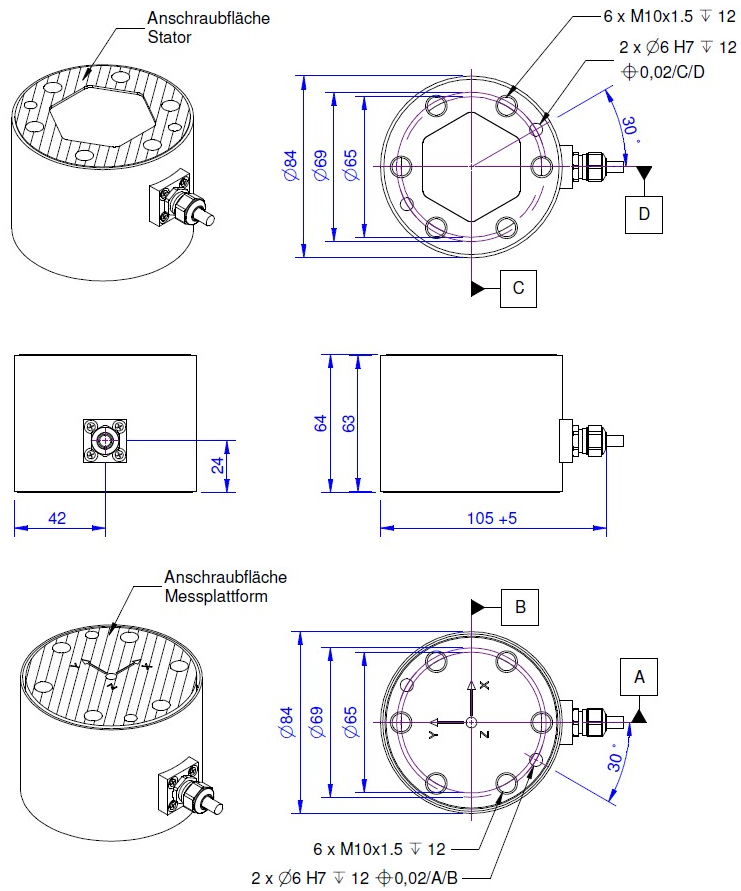

Technical Data

Basic Data			Unit
Type	6-axis force sensor		
Force direction	Tension/Compression		
Rated force Fx	10		kN
Rated force Fy	10		kN
Rated force Fz	20		kN
Force introduction	Innengewinde		
Dimension 1	6x M10x1,5		
Sensor Fastening	Internal thread		
Dimension 2	6x M10x1,5		
Operating force	200		%
Material	Stainless steel		
Natural frequency fx	3.3		kHz
Height	64		mm
Length or Diameter	83		mm
Rated torque Mx	100		Nm
Rated torque My	100		Nm
Rated torque Mz	100		Nm
Torque limit	800		Nm
Bending moment limit	700		Nm

Electrical Data		Unit
Input resistance	350	Ohm
Tolerance input resistance	10	Ohm
Output resistance	350	Ohm
Tolerance output resistance	10	Ohm
Insulation resistance	2	GOhm
Rated range of excitation voltage from	2.5	V
Rated range of excitation voltage to	5	V
Operating range of excitation voltage from	1	V
Operating range of excitation voltage to	5	V
Zero signal from	-1.5	mV/V
Zero signal to	1.5	mV/V
Characteristic value range from	0.2	mV/V
Characteristic value range to	1	mV/V

Eccentricity and Crosstalk		Unit
Crosstalk	1	%FS

Accuracy Data		Unit
Accuracy class	0,2	
Relative linearity error	0.1	%FS
Relative zero signal hysteresis	0.1	%FS
Temperature effect on zero signal	0.1	%FS/K
Temperature effect on characteristic value	0.05	%RD/K
Relative creep	0.1	%FS
Relative repeatability error	0.2	%FS

Environmental Data		Unit
Rated temperature range from	-10	°C
Rated temperature range to	70	°C
Operating temperature range from	-10	°C
Operating temperature range to	85	°C
Storage temperature range from	-10	°C
Storage temperature range to	85	°C
Environmental protection	IP65	

Abbreviation : RD: „Reading“; FS: „Full Scale“;

The application of a calibration matrix is required for the determination of the forces F_x , F_y , F_z and moments M_x , M_y , and M_z from the 6 measurement channels, and to compensate for the crosstalk.

The calibration data are individually determined and documented for the sensor.

The measurement error is expressed individually by the specification of the extended measurement uncertainty ($k = 2$) for the forces F_x , F_y , F_z , and moments M_x , M_y , M_z .

PIN Assignment

Channel	Symbol	Designation	Color	PIN
1	+Us	positive bridge supply	red	
	-Us	negative bridge supply	black	
	+Ud	positive bridge output	green	
	-Ud	negative bridge output	white	
2	+Us	positive bridge supply	blue	
	-Us	negative bridge supply	yellow	
	+Ud	positive bridge output	purple	
	-Ud	negative bridge output	grey	
3	+Us	positive bridge supply	orange	
	-Us	negative bridge supply	brown	
	+Ud	positive bridge output	pink	
	-Ud	negative bridge output	transparent	
4	+Us	positive bridge supply	green-black	
	-Us	negative bridge supply	black-white	
	+Ud	positive bridge output	red-black	
	-Ud	negative bridge output	white-black	
5	+Us	positive bridge supply	purple-black	
	-Us	negative bridge supply	yellow-black	
	+Ud	positive bridge output	bue-black	
	-Ud	negative bridge output	gray-black	
6	+Us	positive bridge supply	pink-black	
	-Us	negative bridge supply	brown-black	
	+Ud	positive bridge output	orange-black	
	-Ud	negative bridge output	transparent-black	

Shield: connected with sensor housing;

Mounting

The forces is applied to an annulus (80 - 50 mm in diameter) on the end faces of the sensor. No force is applied to the area inside the ring.

A centring hole is provided to secure the angular position.

Stiffness Matrix

128.6 kN/mm	0.0	0.0	0.0	2572.6 kN	0.0
0.0	128.6 kN/mm	0.0	-2572.6 kN	0.0	0.0
0.0	0.0	658.6 kN/mm	0.0	0.0	0.0
0.0	-2572.6 kN	0.0	205.8 kNm	0.0	0.0
2572.6 kN	0.0	0.0	0.0	205.8 kNm	0.0
0.0	0.0	0.0	0.0	0.0	120.6 kNm

- The elements with the unit kN/mm describe the relationship between force and path.
- The elements with the unit kNm describe the relationship between torque and twist.
- The elements with the unit kN describe the relationship between torque and path (columns 1 to 3) or the relationship between force and twist (columns 4 to 6)