


Force Sensor KM40 1kN

Item number: 910

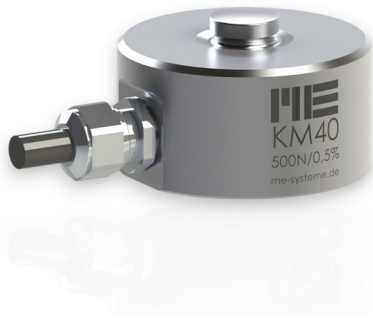

The force sensor KM40 is a precision force sensor in membrane construction for the measurement of compressive forces. The force sensor is fastened to a flat surface with four screws M4. There is a spherical cap with a radius of 50 mm provided for the force transmission. The force is applied with a flat plate against the cap. The strength introduction occurs with a flat plate against the cap.

The hardness of the spherical cap is HRC 54.

A flattening of the spherical cap from a load of about 20kN is therefore possible.


Environmental protection rating is IP 67.

In contrast to the force sensors KD, KD's and LC series lateral forces from about 5% the original naming power can lead to a measurement error greater than 1%. Therefore, the force transmission must be centric.

Optional special version

- Protection class IP68: from rated force 200 N
- Vacuum version $> 10^{-5}$ mbar
- Pressure range up to 8 bar
- Suitable for cleanrooms

Technical Drawing

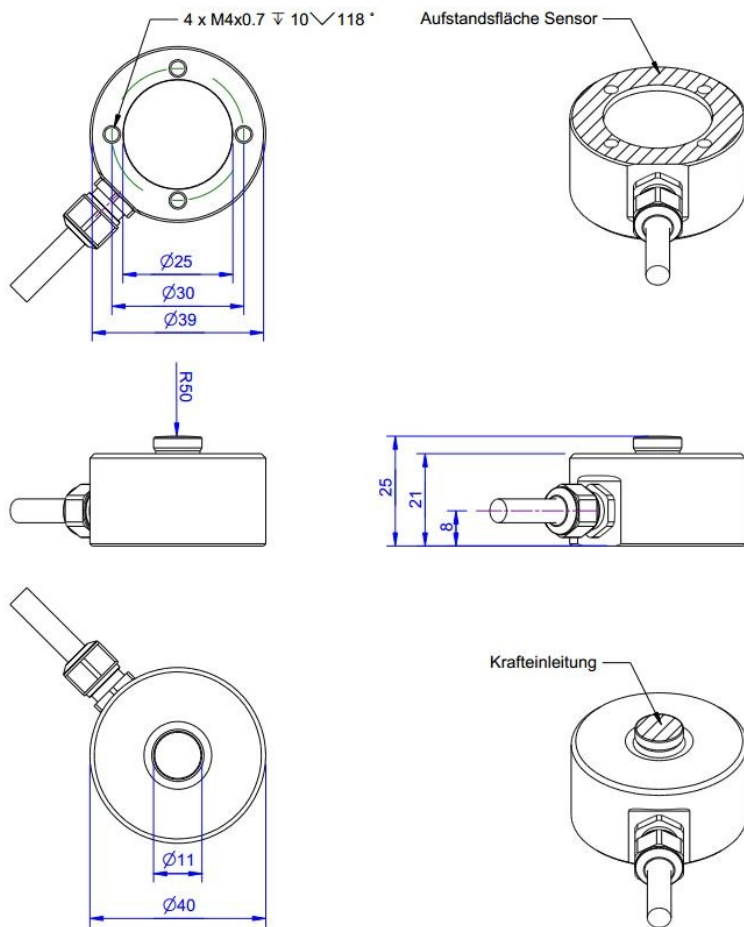

Technical Data

| Basic Data | | Unit |
|----------------------------------|-----------------|------|
| Type | Force load cell | |
| Force direction | Compression | |
| Rated force F _x | 1 | kN |
| Force introduction | Load button | |
| Dimension 1 | Ø11x4 | |
| Sensor Fastening | Circular ring | |
| Dimension 2 | Ø40x7,5 | |
| Operating force | 150 | %FS |
| Rated displacement | 0.07 | mm |
| Lateral force limit | 50 | %FS |
| Material | Stainless steel | |
| Natural frequency f _x | 5 | kHz |
| Dimensions | Ø 40mm x 25mm | |
| Height | 25 | mm |
| Length or Diameter | 40 | mm |
| Variants | 100N...50kN | |

| Electrical Data | | Unit |
|--|-------------------|-----------|
| Input resistance | 390 | Ohm |
| Tolerance input resistance | 40 | ± |
| Output resistance | 350 | Ohm |
| Tolerance output resistance | 1 | ± |
| Insulation resistance | 2x10 ⁹ | Ohm |
| Rated range of excitation voltage from | 2.5 | V |
| Rated range of excitation voltage to | 5 | V |
| Operating range of excitation voltage from | 1 | V |
| Operating range of excitation voltage to | 10 | V |
| Zero signal | 0.05 | mV/V |
| Rated output | 1 | mV/V / FS |

| Accuracy Data | | Unit |
|--|------|-------|
| Accuracy class | 0,5 | |
| Relative linearity error | 0.1 | %FS |
| Relative zero signal hysteresis | 0.05 | %FS |
| Temperature effect on zero signal | 0.02 | %FS/K |
| Temperature effect on characteristic value | 0.02 | %RD/K |
| Relative creep | 0.1 | %FS |

| Environmental Data | | Unit |
|----------------------------------|------|------|
| Rated temperature range from | -10 | °C |
| Rated temperature range to | 70 | °C |
| Operating temperature range from | -10 | °C |
| Operating temperature range to | 85 | °C |
| Storage temperature range from | -10 | °C |
| Storage temperature range to | 85 | °C |
| Environmental protection | IP67 | |

Abbreviation: RD: „Reading“; FS: „Full Scale“;1) The exact nominal sensitivity is indicated in the test report;

Pin Assignment

| Channel | Symbol | Description | Wire color | PIN |
|---------|--------|------------------------|------------|-----|
| | +Us | positive bridge supply | brown | |
| | -Us | negative bridge supply | white | |
| | +Ud | positive bridge output | green | |
| | -Ud | negative bridge output | yellow | |

Pressure load: positive output signal.
Shield- transparent.