

## Force Sensor KM40e 50kN/010

Item number: 10041



The force sensor KM40e is a precision force sensor in membrane construction with integrated miniature electronics for the measurement of compressive forces. The force sensor is fastened to a flat surface with four screws M4. There is a spherical cap with a radius of 50 mm provided for the force transmission. The force is applied with a flat plate against the cap. The strength introduction occurs with a flat plate against the cap. The hardness of the spherical cap is HRC 54. A flattening of the spherical cap from a load of about 20kN is therefore possible.

Environmental protection rating is IP 67.

In contrast to the force sensors of series KD, KDs and LC the lateral forces from about 5% of the nominal load can lead to a measurement error greater than 1%. Therefore, the force transmission must be centric.

The sensor with integrated analog amplifier GSV-13i is a compact measuring system.


The electronics amplifies the strain gauge output signal and allows a simple and direct analog measurement in voltage (0... 10V).

Further variants for voltage (0... 5V) or current (4... 20mA) are available on request.

### Optional special version

- Protection class IP68: from rated force 200 N
- Pressure range up to 8 bar
- Suitable for cleanrooms

## Technical Drawing

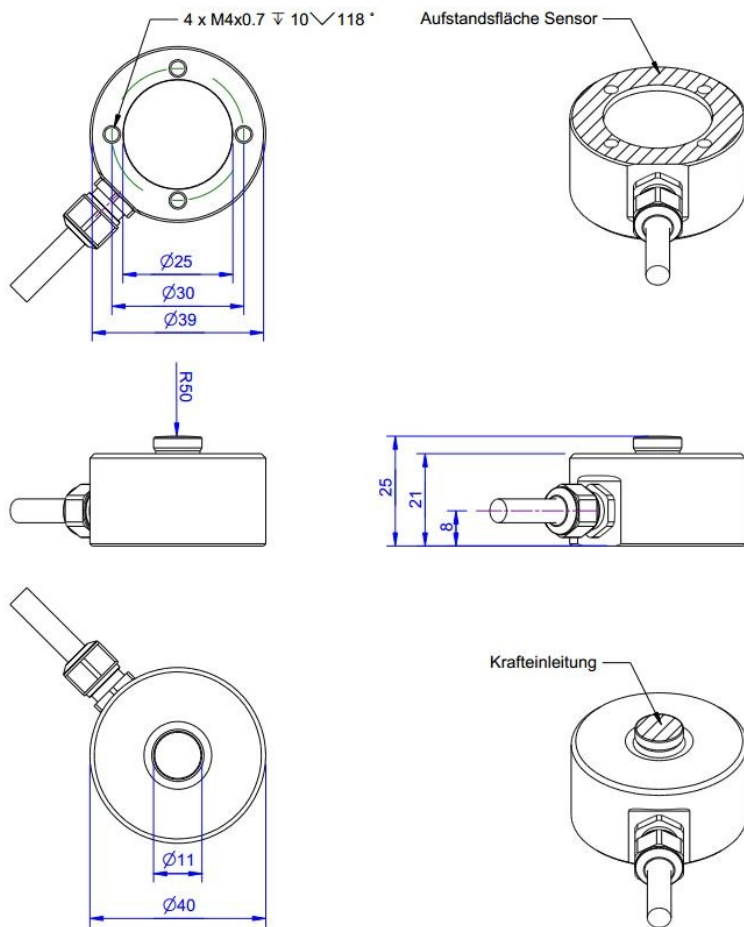

## Technical Data

| Basic Data                       |                 | Unit |
|----------------------------------|-----------------|------|
| Type                             | Force load cell |      |
| Force direction                  | Compression     |      |
| Rated force F <sub>x</sub>       | 50              | kN   |
| Force introduction               | Load button     |      |
| Dimension 1                      | Ø11x4           |      |
| Sensor Fastening                 | Circular ring   |      |
| Dimension 2                      | Ø40x7,5         |      |
| Operating force                  | 150             | %FS  |
| Rated displacement               | 0.07            | mm   |
| Lateral force limit              | 50              | %FS  |
| Material                         | Stainless steel |      |
| Natural frequency f <sub>x</sub> | 5               | kHz  |
| Dimensions                       | Ø 40mm x 25mm   |      |
| Height                           | 25              | mm   |
| Length or Diameter               | 40              | mm   |
| Variants                         | 100N... 50kN    |      |

| Electrical Data                            |                   | Unit |
|--|-------------------|------|
| Input resistance                           | 390               | Ohm  |
| Tolerance input resistance                 | 40                | ±    |
| Output resistance                          | 350               | Ohm  |
| Tolerance output resistance                | 1                 | ±    |
| Insulation resistance                      | 2x10 <sup>9</sup> | Ohm  |
| Rated range of excitation voltage from     | 2.5               | V    |
| Rated range of excitation voltage to       | 5                 | V    |
| Operating range of excitation voltage from | 1                 | V    |
| Operating range of excitation voltage to   | 10                | V    |
| Zero signal                                | 0.05              | mV/V |

| Accuracy Data                              |      | Unit  |
|--|------|-------|
| Accuracy class                             | 0,5  |       |
| Relative linearity error                   | 0.1  | %FS   |
| Relative zero signal hysteresis            | 0.05 | %FS   |
| Temperature effect on zero signal          | 0.02 | %FS/K |
| Temperature effect on characteristic value | 0.02 | %RD/K |
| Relative creep                             | 0.1  | %FS   |
| Analog Output                              |      | Unit  |
| Voltage output from                        | 0.05 | V     |
| Voltage output to                          | 10   | V     |
| Zero adjustment to                         | 0.05 | V     |
| Measuring Frequency                        |      | Unit  |
| Limit frequency (analog)                   | 1000 | Hz    |
| Supply                                     |      | Unit  |
| Supply voltage from                        | 14   | V     |
| Supply voltage to                          | 28   | V     |
| Environmental Data                         |      | Unit  |
| Rated temperature range from               | -10  | °C    |
| Rated temperature range to                 | 70   | °C    |
| Operating temperature range from           | -10  | °C    |
| Operating temperature range to             | 85   | °C    |
| Storage temperature range from             | -10  | °C    |
| Storage temperature range to               | 85   | °C    |
| Environmental protection                   | IP67 |       |

Abbreviation: RD: „Reading“; FS: „Full Scale“;1) The exact nominal sensitivity is indicated in the test report;

## Pin Assignment

| Channel | Symbol     | Description  | Wire color  | PIN |
|---------|------------|--|-------------|-----|
|         | Ub         | Supply voltage<br>(depends on<br>variant)          | brown       |     |
|         | GND        | Ground power<br>supply                             | white       |     |
|         | Ua (Out)   | Output signal 4...<br>20mA / 0... 10V /<br>0... 5V | green       |     |
|         | Tara (Ta)  | Control input for<br>zero balance                  | yellow      |     |
|         | Scale (Sc) | Control input for<br>amplification factor          | grey        |     |
|         |            | Shield   | transparent |     |