


GSV-6BT M8 GSV-6BT M8

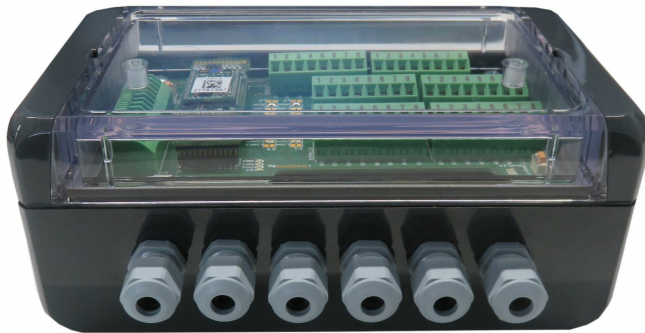

Description

The GSV-6BT is a 6-channel measuring amplifier with Bluetooth connection and data logger function, which offers exceptionally many features in the smallest dimensions.

The GSV-6BT has 6 measurement channels, of which is the first channel for full-bridge strain gauges, channels 2 - 6 are individually configurable as voltage input (single-ended) or strain gauge bridge input including half and quarter bridge configuration. Another 7th channel for acquiring digital pulses is available for connecting incremental encoders or as an input for square-wave signals. The number of channels is configurable from 1 to 7 channels. Channel 7 is reserved for the connection of incremental encoders, channel 1 for the connection of strain gauge full, half or quarter bridges. Channel 1 supports the reading of TEDS memories to configure automatically the scaling factor for the connected sensor. In addition, two threshold outputs can be configured for channel 1.

The GSV-6BT has gold-plated solder pads for connecting the sensors and the supply voltage.

The Bluetooth connection supports BT Classic with Serial Port Profile (SPP) for complete configuration and continuous messaging, and BT LowEnergy (LE) with some services (GATT) for reading measurement data and battery voltage, e.g. via smartphone.

The measurement data can be recorded on a micro-SD memory card, whereby there are various configuration options, such as continuous recording up to 3000 readings per second, long recording intervals with power management (battery saving mode) and digital input triggered recording. The recorded files can also be downloaded via Bluetooth SPP. A real-time clock creates timestamps in real time in the measurement data files.

Other features

- The connected 3.7V lithium-ion battery can be charged by an integrated charging circuit.
- The power supply via a Li-Ion battery from 3,6V ... 4,2V is possible.
- The temperature in the device and the battery voltage can be measured
- The simultaneous zeroing of all channels can be triggered via a digital input ("tare").
- The GSV-6BT is protected against vibration by a full encapsulation in a plastic housing.
- The configuration and acquisition of measurement data is possible with the program GSVmulti in the mode "BT Classic" with Serial Port Profiles (SPP)
- The integrated Bluetooth module has its own microcontroller, which offers the self-programming user a simple scripting language to implement their own embedded applications. All functions of the GSV-6 CPU and all supported BT services as well as additional digital outputs and a dedicated LED are available to him.

Technical Data

Input analog

Number of analog inputs	6
Input sensitivity-steps	2.0 1.0 0.5 8 mV/V
Input sensitivity-stepsless f	0.1 ... 8 mV/V
Input resistance strain-gauge-full-bridge	350 ... 5000 Ohm
Input resistance strain-gauge-half- /quarter-bridge	350 1000 Ohm
Input voltage f	0 ... 10 V
Input resistance-voltage	300 kOhm

Measuring frequency

Data frequency f	1 ... 500 1/s
Sampling frequency	50 kHz

Supply

Supply voltage f	3.7 ... 4.2 V
Current consumption f	0.7 ... 130 mA
Strain gauge bridge supply	3 V

Interface

Type of the interface	bluetooth teds
Quantity of the interface	1
Version of the interface	Bluetooth 4.0 (LE)

Zero adjustment

Type	digital software
Tolerance	2 LSB
Time period	1 ms
Trigger level f	2.8 ... 3.3 V
Trigger edge	rising

Temperature

Rated temperature range f	0 ... 65 °C
Operating temperature range f	-20 ... 85 °C
Environmental protection	IP20 / IP44

Basis Data

Dimensions	152 x 97 x 61 mm x mm x mm
Connection	screw terminal
Number of channels	6-channel

Precision

Accuracy class	0,1%
Resolution	16 Bit

Manual

Note on the bridge circuit: The allowable range for + Ud and -Ud is 1.32V to 1.68V. The maximum, unbalanced series resistor (one-sided series resistance in + Us or -Us) must not exceed 26% of the bridge resistance.

The table lists the maximum possible series resistors, which may be unilaterally connected in + Us or -Us.

Strain Gauge bridge circuit	Max. Series resistor unbalanced
350 Ohms	91 Ohms
700 Ohms	182 Ohms
1000 Ohms	260 Ohms
1400 Ohms	364 Ohms



Note on contacting

The connection of sensor, battery and voltage for trickle charging is made via solder contacts. The soldering temperature should not exceed 320°C. The cross section of the connecting cables should not be larger than 0.09 mm² (AWG 28).

Hinweis zur Spannungsversorgung

The GSV-6BT must be powered by a rechargeable battery (3.7V ...4.2V). Additionally a trickle charge with 5V can be carried out.

accessories

Description	Description
	Bluetooth-USB-Adapter Bluetooth 4.0 adapter, USB 2.0 Micro
	Li-Ion Capacity: 2600 mAh, Voltage: 3,7 V, Minimum discharge Voltage: 2,75V, Charge current (max): 0,28A (1C), Charge voltage (max.): 4,2V (4,2V +- 0,03V), Weight 47,0 g, Dimensions: 65mm x 18,40mm;