

GSV-2AS -5+5/250/2/CANOpen



Highlights

- Tare function via control cable
- RS232, RS485 or CAN/CANOpen
- analogue output $\pm 5V$
- optionally 4...20mA output signal
- 24 Bit, to 200.000 Digits display resolution
- extensive software support
- two threshold generators
- trigger input

ME-Meßsysteme GmbH
Neuendorfstr. 18a
DE-16761 Hennigsdorf


Tel +49 (0)3302 8982 4 60
Fax +49 (0)3302 8982 4 69

Mail info@me-systeme.de
Web www.me-systeme.de



Description

Dimensions

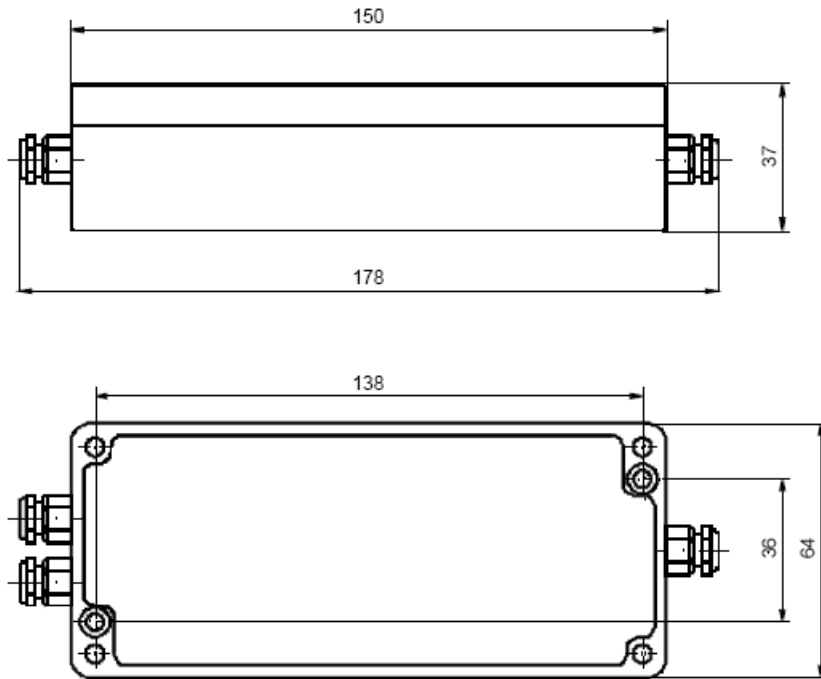

Technical Data

Input analog

Number of analog inputs	1
Input sensitivity-steps	2.0 3.5 mV/V
Input resistance strain-gauge-full-/half-bridge	87 ... 5000 Ohm
Input voltage f	0 ... 10 V
Input resistance-voltage	56 kOhm

Output analog

Number of analog outputs	1
Voltage output f	-5 ... 5 V
Output resistance - voltage	47 Ohm

Measuring frequency

Data frequency f	0 ... 1000 Hz
Limit frequency (analog)	1700 Hz

Supply

Supply voltage f	10 ... 29 V
Current consumption f	100 ... 120 mA
Strain gauge bridge supply	5 2.5 V

Interface

Type of the interface	canopen rs232 can
Quantity of the interface	3

Zero adjustment

Type	digital Regulation software
Tolerance	0.01 %
Time period	1 ms
Debouncing time	4 ms
Trigger level f	3.4 ... 29 V
Trigger edge	Level

Filter

Order	2
Algorithm	bessel

Temperature

Rated temperature range f	-10 ... 65 °C
Operating temperature range f	-40 ... 85 °C
Environmental protection	IP66

Basis Data



Housing	Aluminium
Connection	screw terminal
Number of channels	1-Kanal

Precision

Accuracy class	0,05%
Relative linearity error	0.02 %FS
Temperature effect on the zero point	0.2 %FS/10°C
Temperature effect on the measuring sensitivity	0.1 %RD/10°C
Resolution	24 Bit