

K6D40 50N/5Nm/CG, 200N/5Nm/CG, 500N/20Nm/CG, 50N/5Nm/MP11, 200N/5Nm/MP11, 500N/20Nm/MP11



Description


The K6D40 multi-component sensor is designed to measure the forces and torques on three mutually perpendicular axes. Owing to this sensor's very light weight of only 160 g (K6D40 200 N / 5 Nm) or 450 g (K6D40 500 N / 20 Nm), it is very well suited for use in robotics, e.g.




- For collision detection
- "Teach-In"
- Presence detection and error detection
- Force or torque-controlled operation
- Load measurement in medicine, prosthetics, orthopaedic engineering or gait analysis
- Measurement in sports medicine
- Comfort / ergonomics measurements

The force and torque loadings are evaluated e.g. using a GSV-1A8USB measurement amplifier. The 6 load values can be calculated using a Windows DLL or using LabVIEW with the aid of a digital calibration document provided. The calibration document contains the individual calibration factors and error corrections for the sensor.

The K6D40 200 N / 5 Nm sensor is made from aluminium alloy with a stainless steel housing. The K6D40 500N/20Nm sensor is made entirely of stainless steel.

Dimensions

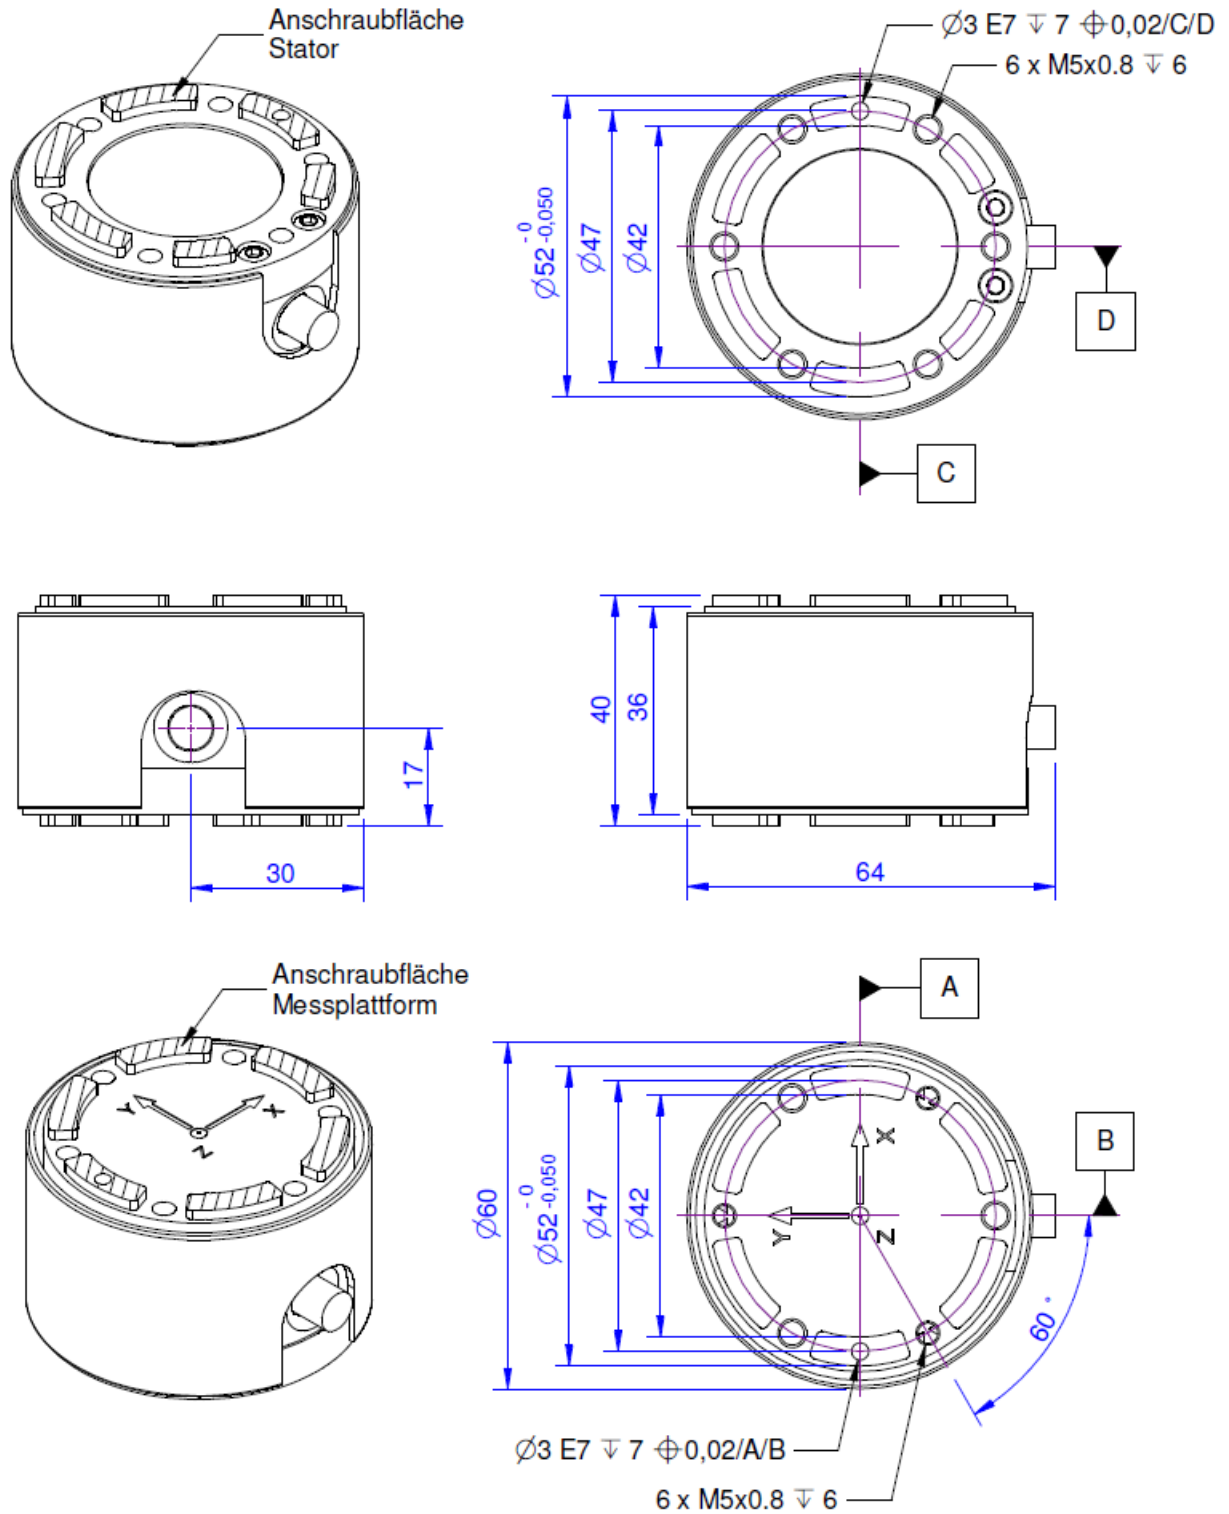

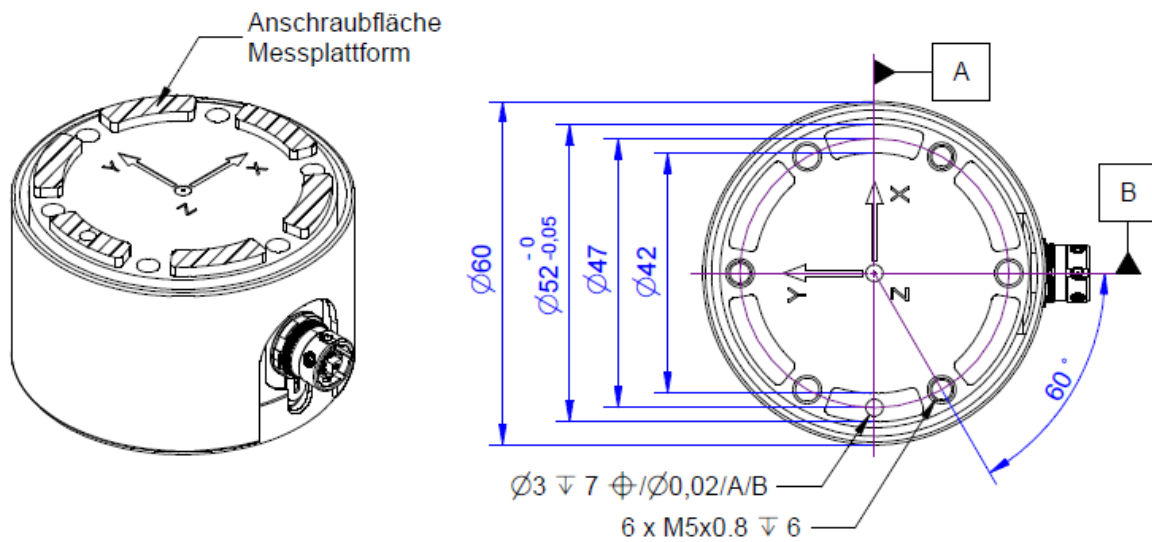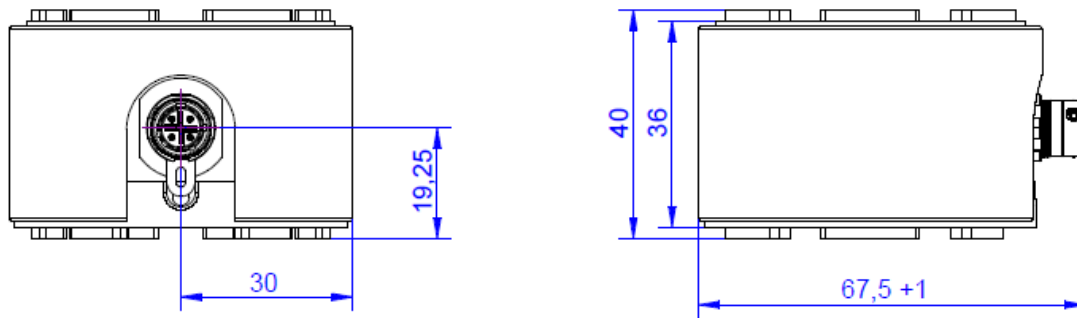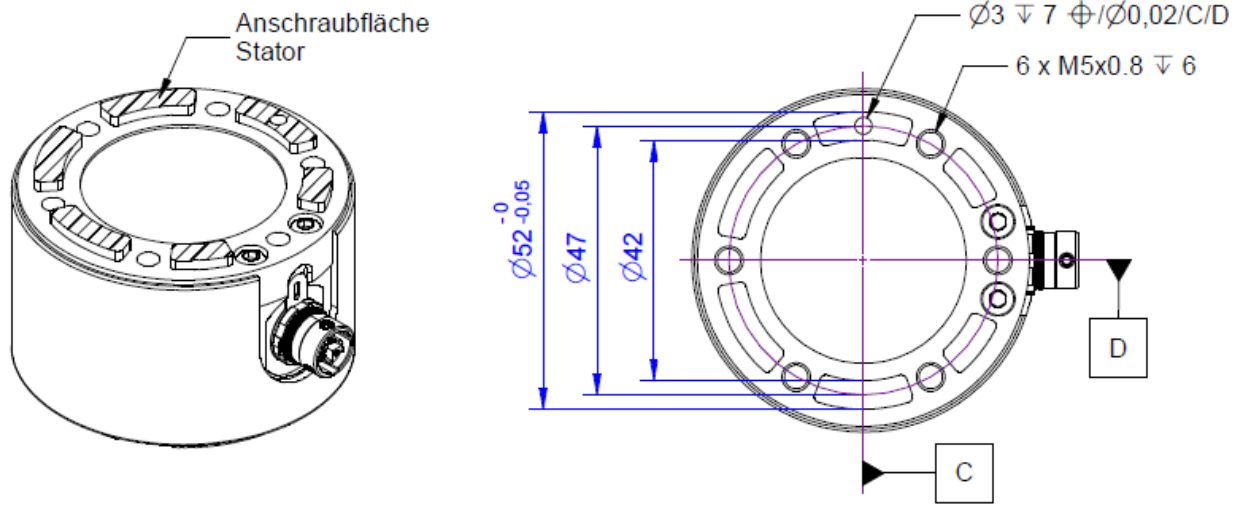

Technical Data

Force sensor

Type	6-Axis force sensor
Force direction	Tension / Compression
Force introduction	Inner thread
Dimension 1	6x M5x0,8
Sensor Fastening	Inner thread
Dimension 2	6x M5x0,8
Operating force	400 % FS
Material	Stainless steel
Dimensions	Ø60 x 40 mm
Height	40 mm
Length or Diameter	60 mm
Torque limit	300 % FS
Bending moment limit	500 % FS

Electrical Data

Input resistance	350 Ohm
Tolerance input resistance	10 Ohm
Output resistance	350 Ohm
Tolerance output resistance	10 Ohm
Insulation resistance	2 GOhm
Rated range of excitation voltage f	2.5 ... 5 V
Operating range of excitation voltage f	1 ... 5 V
Zero signal to	-1.5 mV/V
Zero signal from	1.5 mV/V

Precision

Accuracy class	0,2%
Relative linearity error	0.1 %FS
Relative zero signal hysteresis	0.1 %FS
Temperature effect on zero signal	0.1 %FS/K
Temperature effect on characteristic value	0.05 %RD/K
Relative creep	0.1 %FS
Relative repeatability error	0.5 %FS

Connection Data

Connection type	24 conductor open
Name of the connection	33-24 PUR/24x0,03 mm ²
Cable length	5 m

Temperature

Rated temperature range f	-10 ... 70 °C
Operating temperature range f	-10 ... 85 °C
Storage temperature range f	-10 ... 85 °C
Environmental protection	IP65



Abbreviation : RD: „Reading“; FS: „Full Scale“;

The application of a calibration matrix is required for the determination of the forces F_x , F_y , F_z and moments M_x , M_y , and M_z from the 6 measurement channels, and to compensate for the crosstalk.

The calibration data are individually determined and documented for the sensor.

The measurement error is expressed individually by the specification of the extended measurement uncertainty ($k = 2$) for the forces F_x , F_y , F_z , and moments M_x , M_y , M_z .

Pin Configuration

Channel	Symbol	Description	Wire colour	PIN
1	+Us	positive bridge supply	yellow	14
	-Us	negative bridge supply	green	13
	+Ud	positive bridge output	white	1
	-Ud	negative bridge output	brown	5
2	+Us	positive bridge supply	gray	15
	-Us	negative bridge supply	black	16
	+Ud	positive bridge output	red	7
	-Ud	negative bridge output	pink	6
3	+Us	positive bridge supply	brown-blue	23
	-Us	negative bridge supply	white-red	24
	+Ud	positive bridge output	brown-red	12
	-Ud	negative bridge output	white-pink	4
4	+Us	positive bridge supply	white-yellow	13
	-Us	negative bridge supply	yellow-brown	20
	+Ud	positive bridge output	brown-green	9
	-Ud	negative bridge output	white-green	3
5	+Us	positive bridge supply	white-gray	21
	-Us	negative bridge supply	white-blue	22
	+Ud	positive bridge output	gray-brown	10
	-Ud	negative bridge output	pink-brown	11
6	+Us	positive bridge supply	gray-pink	18
	-Us	negative bridge supply	purple	17
	+Ud	positive bridge output	red-blue	8
	-Ud	negative bridge output	blue	2
-	shield		transparent	

Shield: connected with sensor housing;

Channel	Symbol	Description	Wire colour
1	+Us	positive bridge supply	red
	-Us	negative bridge supply	black
	+Ud	positive bridge output	green
	-Ud	negative bridge output	white
2	+Us	positive bridge supply	blue
	-Us	negative bridge supply	yellow
	+Ud	positive bridge output	purple
	-Ud	negative bridge output	grey
3	+Us	positive bridge supply	orange
	-Us	negative bridge supply	brown
	+Ud	positive bridge output	pink
	-Ud	negative bridge output	transparent
4	+Us	positive bridge supply	green-black
	-Us	negative bridge supply	black-white
	+Ud	positive bridge output	red-black



	-Ud	negative bridge output	white-black
5	+Us	positive bridge supply	purple-black
	-Us	negative bridge supply	yellow-black
	+Ud	positive bridge output	blue-black
	-Ud	negative bridge output	gray-black
6	+Us	positive bridge supply	pink-black
	-Us	negative bridge supply	brown-black
	+Ud	positive bridge output	orange-black
	-Ud	negative bridge output	transparent-black

Shield: connected with sensor housing;

Manual

Stiffness Matrix K6D40 200N/5Nm

5.8 kN/mm	0.0	0.0	0.0	116 kN	0.0	u_x
0.0	5.8 kN/mm	0.0	-116 kN	0.0	0.0	u_y
0.0	0.0	32.3 kN/mm	0.0	0.0	0.0	u_z
0.0	-116 kN	0.0	9.3 kNm	0.0	0.0	ϕ_{ix}
116 kN	0.0	0.0	0.0	9.3 kNm	0.0	ϕ_{iy}
0.0	0.0	0.0	0.0	0.0	5.0 kNm	ϕ_{iz}

Stiffness Matrix K6D40 500N/20Nm

15.9 kN/mm	0.0	0.0	0.0	319 kN	0.0	u_x
0.0	15.9 kN/mm	0.0	-319 kN	0.0	0.0	u_y
0.0	0.0	88.5 kN/mm	0.0	0.0	0.0	u_z
0.0	-319 kN	0.0	25.5 kNm	0.0	0.0	ϕ_{ix}
319 kN	0.0	0.0	0.0	25.5 kNm	0.0	ϕ_{iy}
0.0	0.0	0.0	0.0	0.0	13.8 kNm	ϕ_{iz}

Element	Description
[kN/mm]	force- displacement
[kNm]	torque- twist
[kN]	force- twist and torque- displacement











Mounting

The force is applied to an annulus / to 6 segments of a circle, 52 mm – 42mm in diameter, on the end faces of the sensor. No force is applied to the area inside the ring with a diameter of 42 mm.

The areas outside the annuli can be used for centring purposes. A centring hole is provided to secure the angular position.

accessories

Description	Description
	K6D-CalibrationMatrix SL
	GSV-8DS 8-channel amplifier with USB port, analog output, UART interface. Other versions GSV-8AS CAN with Canbus and GSV-8AS EC with EtherCAT fieldbus.
	Connection cable MP11/f-D-Sub44HD/m Adapter cable for connecting the K6D sensor to an 8-channel measuring amplifier GSV-8DS SubD44HD
	Configuration SubD44/m/HD Assembling the connector to sensor cable; Connector Type SubD, 44 pins, male (male), with hood
	GSV-8AS 8-channel amplifier with USB port, analog output, UART interface. Other versions GSV-8AS CAN with Canbus and GSV-8AS EC with EtherCAT fieldbus.
	Configuration 24p/m/M16 Round plug, 24 pole, configured with sensor cable
	K6D-Adapter Development Indicative offer for an adapter set, Consisting of e.g. 2 plates, For mounting a device / flange on K6D sensor;
	K6D-CalibrationMatrix SL/Plus High accuracy calibration matrix for 6-axis force/torque sensors;