

## KD45 $\pm 2\text{N}$ , $\pm 5\text{N}$ , $\pm 10\text{N}$ , $\pm 20\text{N}$ , $\pm 50\text{N}$




### Description

The force sensor KD45 has the geometry of a miniature load cell. It is fastened on one side using the through holes  $\varnothing 3.2$ . There is a thread M3 for force transmission.

Force transmission is displaced parallel under loading. The force sensor tolerates displacements of force transmission and lateral forces due to its design as a double beam.

The force sensor KD45 is designed as a multi-range sensor. The accuracy of 0.1% is already reached at a nominal output of 0.5mV/V. This means that the zero point stability is 4 times higher than in a sensor with nominal output of 2mV/V. The KD45 force sensor can be used up to an output signal of 2mV/V or up to four times the specified nominal force.

## Dimensions

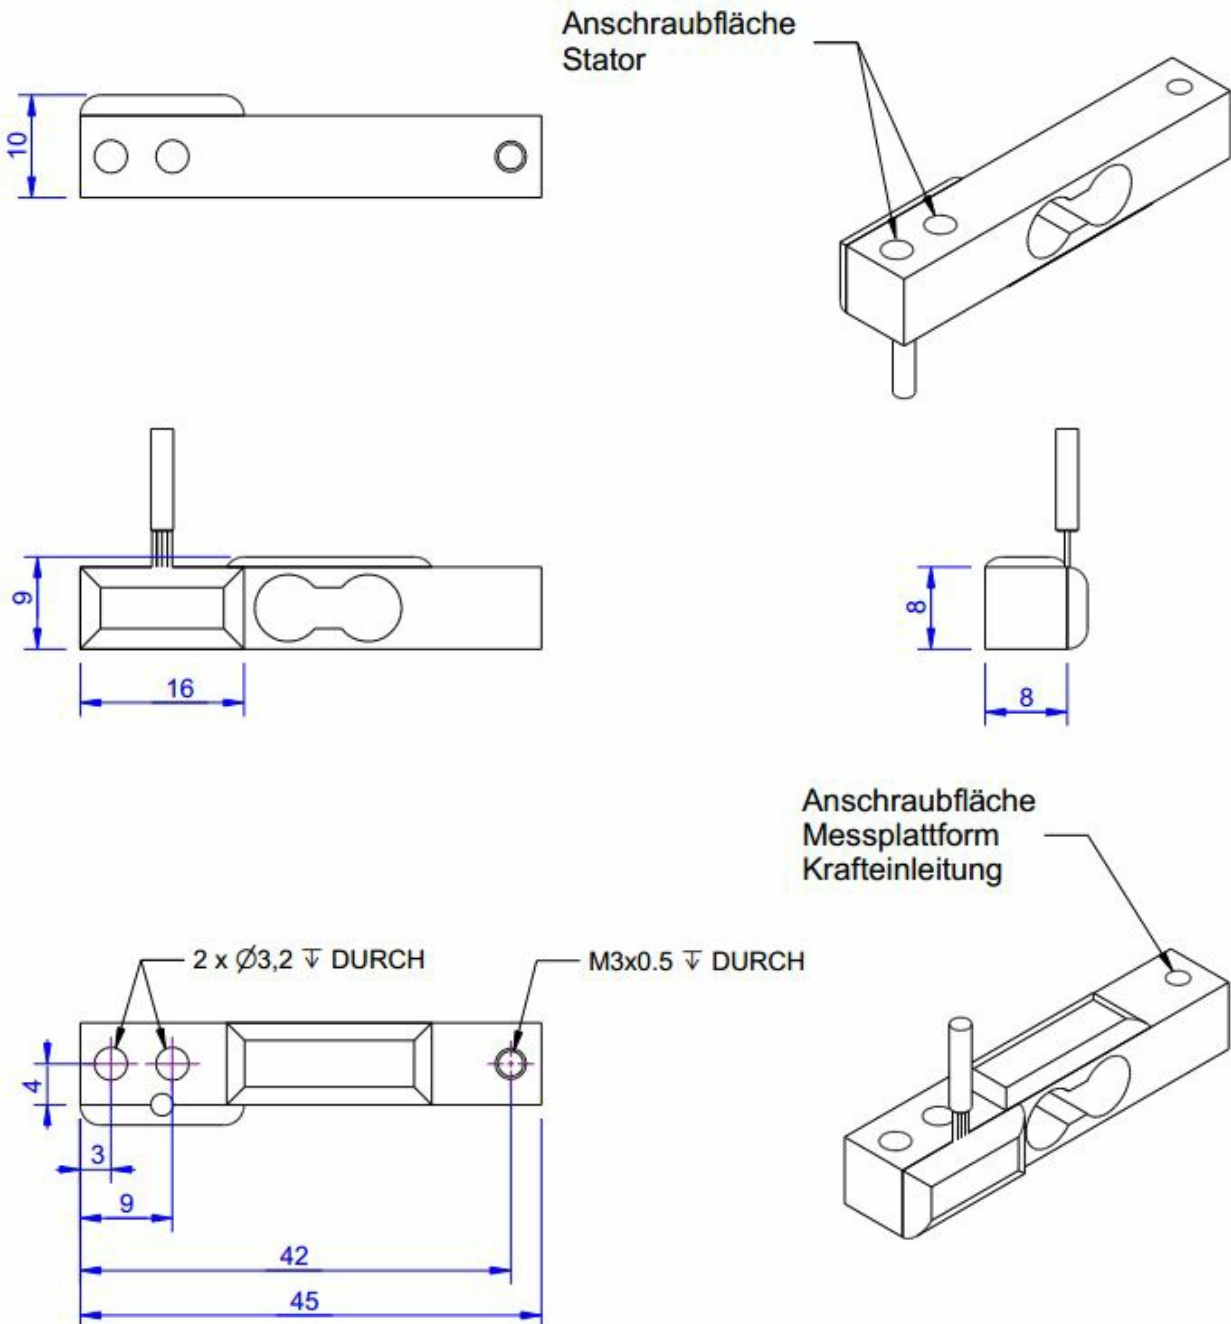



## Technical Data

### Kraftsensoren

Type	Force sensor
Force direction	Tension / Compression
Force introduction	Inner thread
Dimension 1	1xM3x0,5
Sensor Fastening	Through bore
Dimension 2	2xØ3,2
Operating force	400 %FS
Rated displacement	0.1 mm
Lateral force limit	100 %FS
Natural frequency	2 kHz
Height	8 mm
Length or Diameter	45 mm

### Elektrische Daten

Input resistance	420 Ohm
Tolerance input resistance	30 Ohm
Output resistance	350 Ohm
Tolerance output resistance	3 Ohm
Insulation resistance	5x10 <sup>9</sup> Ohm
Rated range of excitation voltage f	2.5 ... 5 V
Operating range of excitation voltage f	1 ... 10 V
Zero signal	0.05 mV/V
Rated output	0.5 mV/V / FS
relative error of characteristic value	0.1 %

### Precision

Accuracy class	0,1%
Relative linearity error	0.1 %FS
Relative zero signal hysteresis	0.1 %FS
Temperature effect on zero signal	0.02 %FS/K
Temperature effect on characteristic value	0.01 %RD/K
Relative creep	0.1 %FS

### Connection Data



Connection type	4 conductor open
Name of the connection	STC-31V-4
Cable length	1 m

### Temperature

Rated temperature range f	-10 ... 70 °C
Operating temperature range f	-10 ... 85 °C
Storage temperature range f	-10 ... 85 °C
Environmental protection	IP65

Abbreviation: RD: „Reading“; FS: „Full Scale“;  
1) The exact nominal sensitivity is indicated in the test report.







## Pin Configuration

Channel	Symbol	Description	Wire colour	PIN
	+Us	positive bridge supply	red	
	-Us	negative bridge supply	black	
	+Ud	positive bridge output	green	
	-Ud	negative bridge output	white	

*Pressure load : positive output signal*

## accessories

Description		Description
	Calibration Certificate kn/20/5	Factory calibration certificate for force to 20 kN in accordance with DIN EN ISO / IEC 17025 for test materials monitoring according to DIN ISO 9001: 2008 with 5 load levels and 3 series of measurements.
	GSV-1H	Measuring amplifier in top-hat rail housing for sensors with strain gauges. Analogue output -10V...+10V, limiting frequency 250Hz, 4 input sensitivities from 2.0mV/V.
	GSV-1A	Measuring amplifier in aluminum housing (IP66) for sensors with strain gauges. two round plugs M12, analogue output -10V...+10V, limiting frequency 250Hz, 4 input sensitivities from 2.0 mV/V.
	GSV-6K	analog amplifier pcb for sensors with strain gauges. Analog output configurable; sampling frequency is 10Hz ... 25kHz, input sensitivity adjustable 0.1 mV / V ... 8 mV / V



## Orderoptions

Type	Description
KD45	aluminium, temperature range -10 ... +70 °C (standard type)
KD45 VA	stainless steel, temperature range -10 ... +70 °C
KD45 VA/HT	stainless steel, temperature range -20 ... +150 °C