



LCB110 300g, 600g

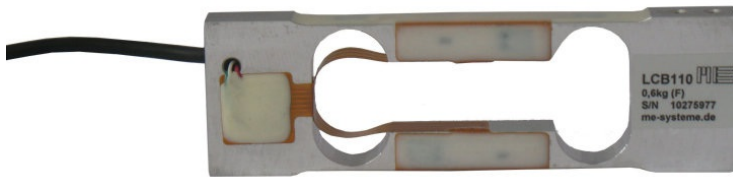

Description

Dimensions

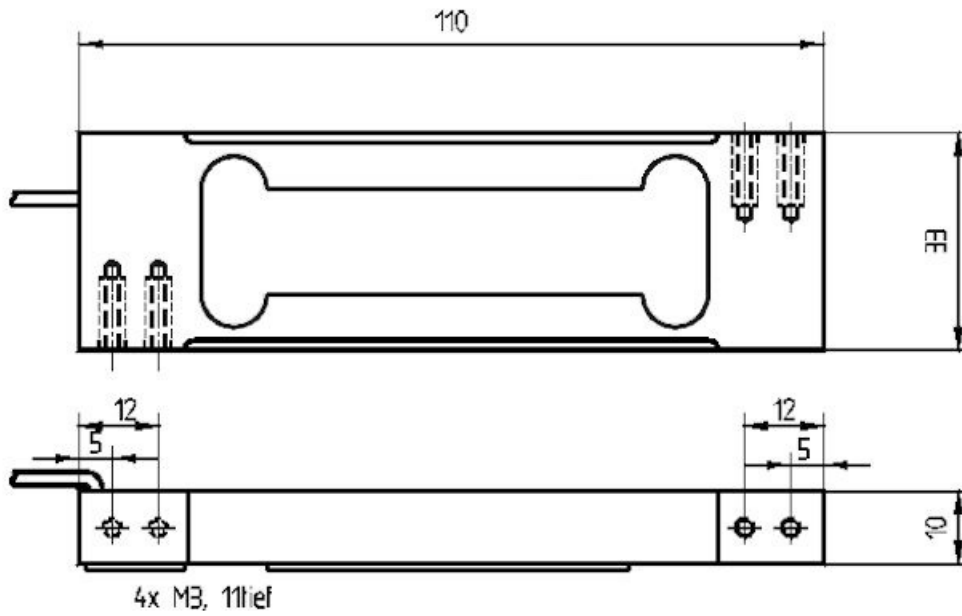

Technical Data

Electrical Data

Input resistance	415 Ohm
Tolerance input resistance	20 Ohm
Output resistance	350 Ohm
Tolerance output resistance	3 Ohm
Insulation resistance	2 GOhm
Rated range of excitation voltage f	2.5 ... 5 V
Operating range of excitation voltage f	1 ... 10 V
Zero signal	10 %Fs
Rated output	0.9 mV/V
relative error of characteristic value	0.1 mV/V

Precision

Accuracy class	0,1%
Temperature effect on zero signal	0.1 % Fs / 10°C
Temperature effect on characteristic value	0.03 % Rd / 10°C
Relative creep	0.05 %Rd

Connection Data

Connection type	4 conductor open
Cable length	0.4 m

Temperature

Rated temperature range f	-10 ... 40 °C
Operating temperature range f	-30 ... 70 °C
Storage temperature range f	-30 ... 70 °C
Environmental protection	IP66

Force sensor

Type	load cell
Force direction	Compression
Material	Aluminium alloy
Breaking force	300 %Fs








Pin Configuration

Symbol	Description	Wire colour
+Us	positive bridge supply	green
-Us	negative bridge supply	black
+Ud	positive bridge output	red
-Ud	negative bridge output	white

Shield- transparent.

accessories

Description Description	
	GSV-15KL4 Junction box with measuring amplifier for sensors with strain gauges. Analogue output ± 10 Volt and 4...20 mA configurable.
	KL4 CG clamping box for parallel connection of 4 sensors, dimensions: 175mm x 105mm x 60mm, 4xPG9, 7-pole
	KL4 M12 clamping box for parallel connection of 4 sensors, dimensions: 175mm x 105mm x 60mm, 4xM12 female, 1xM12 male
	GSV-1H Measuring amplifier in top-hat rail housing for sensors with strain gauges. Analogue output -10V...+10V, limiting frequency 250Hz, 4 input sensitivities from 2.0mV/V.
	GSV-6K Analogue measuring amplifier in plug housing for sensors with strain gauges. Analogue output configurable, TEDS, sampling frequency 10Hz ... 25kHz, input sensitivity configurable 0.1mV/V ... 8mV/V