


## LCB120 10kg, 20kg, 50kg, 100kg, 200kg, 350kg, 500kg



### Description

## Dimensions

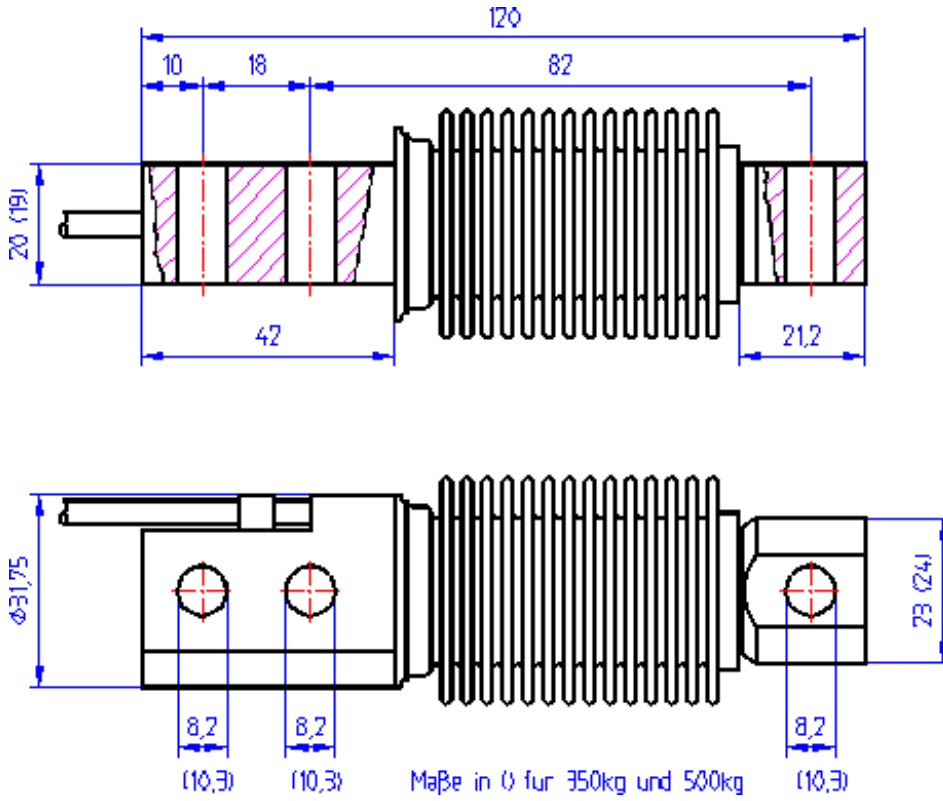



## Technical Data

### Kraftsensoren

Type	load cell
Force direction	Tension / Compression
Material	Stainless steel
Breaking force	300 %Fs

### Elektrische Daten

Input resistance	460 Ohm
Tolerance input resistance	50 Ohm
Output resistance	350 Ohm
Tolerance output resistance	3.5 Ohm
Insulation resistance	5 GOhm
Rated range of excitation voltage f	2.5 ... 5 V
Operating range of excitation voltage f	1 ... 10 V
Zero signal	2 %Fs
Rated output	2 mV/V
relative error of characteristic value	0.02 mV/V

### Precision

Accuracy class	0,02%
Temperature effect on zero signal	0.0047 %Fs / 5°C
Temperature effect on characteristic value	0.005 %Rd / 5°C
Relative creep	0.0245 %Rd

### Connection Data

Connection type	4 conductor open
Cable length	3 m

### Temperature

Rated temperature range f	-10 ... 40 °C
Operating temperature range f	-40 ... 80 °C
Storage temperature range f	-40 ... 90 °C
Environmental protection	IP66/68








## Pin Configuration

Symbol	Description	Wire colour
+Us	positive bridge supply	green
-Us	negative bridge supply	black
+Ud	positive bridge output	red
-Ud	negative bridge output	white

Shield- transparent.

## accessories

Description	
	<b>GSV-15KL4</b> Junction box with measuring amplifier for sensors with strain gauges. Analogue output $\pm 10$ Volt and 4...20 mA configurable.
	<b>KL4 CG</b> clamping box for parallel connection of 4 sensors, dimensions: 175mm x 105mm x 60mm, 4xPG9, 7-pole
	<b>KL4 M12</b> clamping box for parallel connection of 4 sensors, dimensions: 175mm x 105mm x 60mm, 4xM12 female, 1xM12 male
	<b>GSV-1H</b> Measuring amplifier in top-hat rail housing for sensors with strain gauges. Analogue output -10V...+10V, limiting frequency 250Hz, 4 input sensitivities from 2.0mV/V.
	<b>GSV-6K</b> analog amplifier PCB for sensors with strain gauges. Analog output configurable; sampling frequency is 10Hz ... 25kHz, input sensitivity adjustable 0.1 mV / V ... 8 mV / V