

## TA125 $\pm 15\text{Nm}$ , $\pm 50\text{Nm}$ , $\pm 120\text{Nm}$ , $\pm 350\text{Nm}$ , $\pm 600\text{Nm}$




### Description

The torque sensor TA125 is suitable for measuring the reaction torque up to a nominal torque of 600Nm (corded, non-rotating).

The torque sensor TA125 is used to monitor torques in quality assurance.

## Dimensions

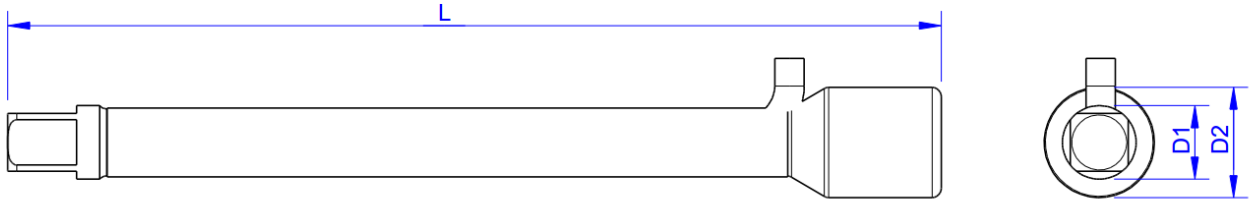



## Technical Data

### Basis Data

Type	full cylinder
Maximum operating torque	150 %FS
Breaking torque	400 %FS
Rated torsion angle	0.7 °/FS
Torque introduction	Außenvierkant
Dimension 1	1/4"
drehmomentausleitung	Innenvierkant
Dimension 2	1/4"
Material	Tool steel

### Elektrische Daten

Input resistance	350 Ohm
Tolerance input resistance	5 ±
Output resistance	350 Ohm
Tolerance output resistance	5 ±
Insulation resistance	5x10 <sup>9</sup> Ohm
Rated range of excitation voltage f	2.5 ... 5 V
Operating range of excitation voltage f	1 ... 10 V
Zero signal	0.05 mV/V
Rated output	2.3 mV/V / FS

### Precision

Accuracy class	1%
Relative linearity error	0.1 %FS
Relative zero signal hysteresis	0.1 %FS
Temperature effect on zero signal	0.01 %FS/K
Temperature effect on characteristic value	0.01 %RD/K
Relative creep	0.05 %FS

### Connection Data

Connection type	4 conductor open
-----------------	------------------

### Temperature

Rated temperature range f	-10 ... 60 °C
---------------------------	---------------



Operating temperature range f	-10 ... 85 °C
Storage temperature range f	-10 ... 85 °C

*Abbreviation : RD: „Reading“; FS: „Full Scale“;*

*1) The exact nominal sensitivity is indicated in the test report.*



## accessories

Description	Description
Factory calibration certificate Nm/50/5	Detection of the characteristic value and the traceability to DKD torque device
Factory calibration certificate Nm/50/5/System	Proof of the characteristic value and the traceability on DAkkS torque device, including system calibration
Factory calibration certificate Nm/200/5	Detection of the characteristic value and the traceability to DKD torque device
Factory calibration certificate Nm/200/5/System	