


TS110a $\pm 20\text{Nm}$, $\pm 50\text{Nm}$, $\pm 100\text{Nm}$, $\pm 200\text{Nm}$



Description

Dimensions

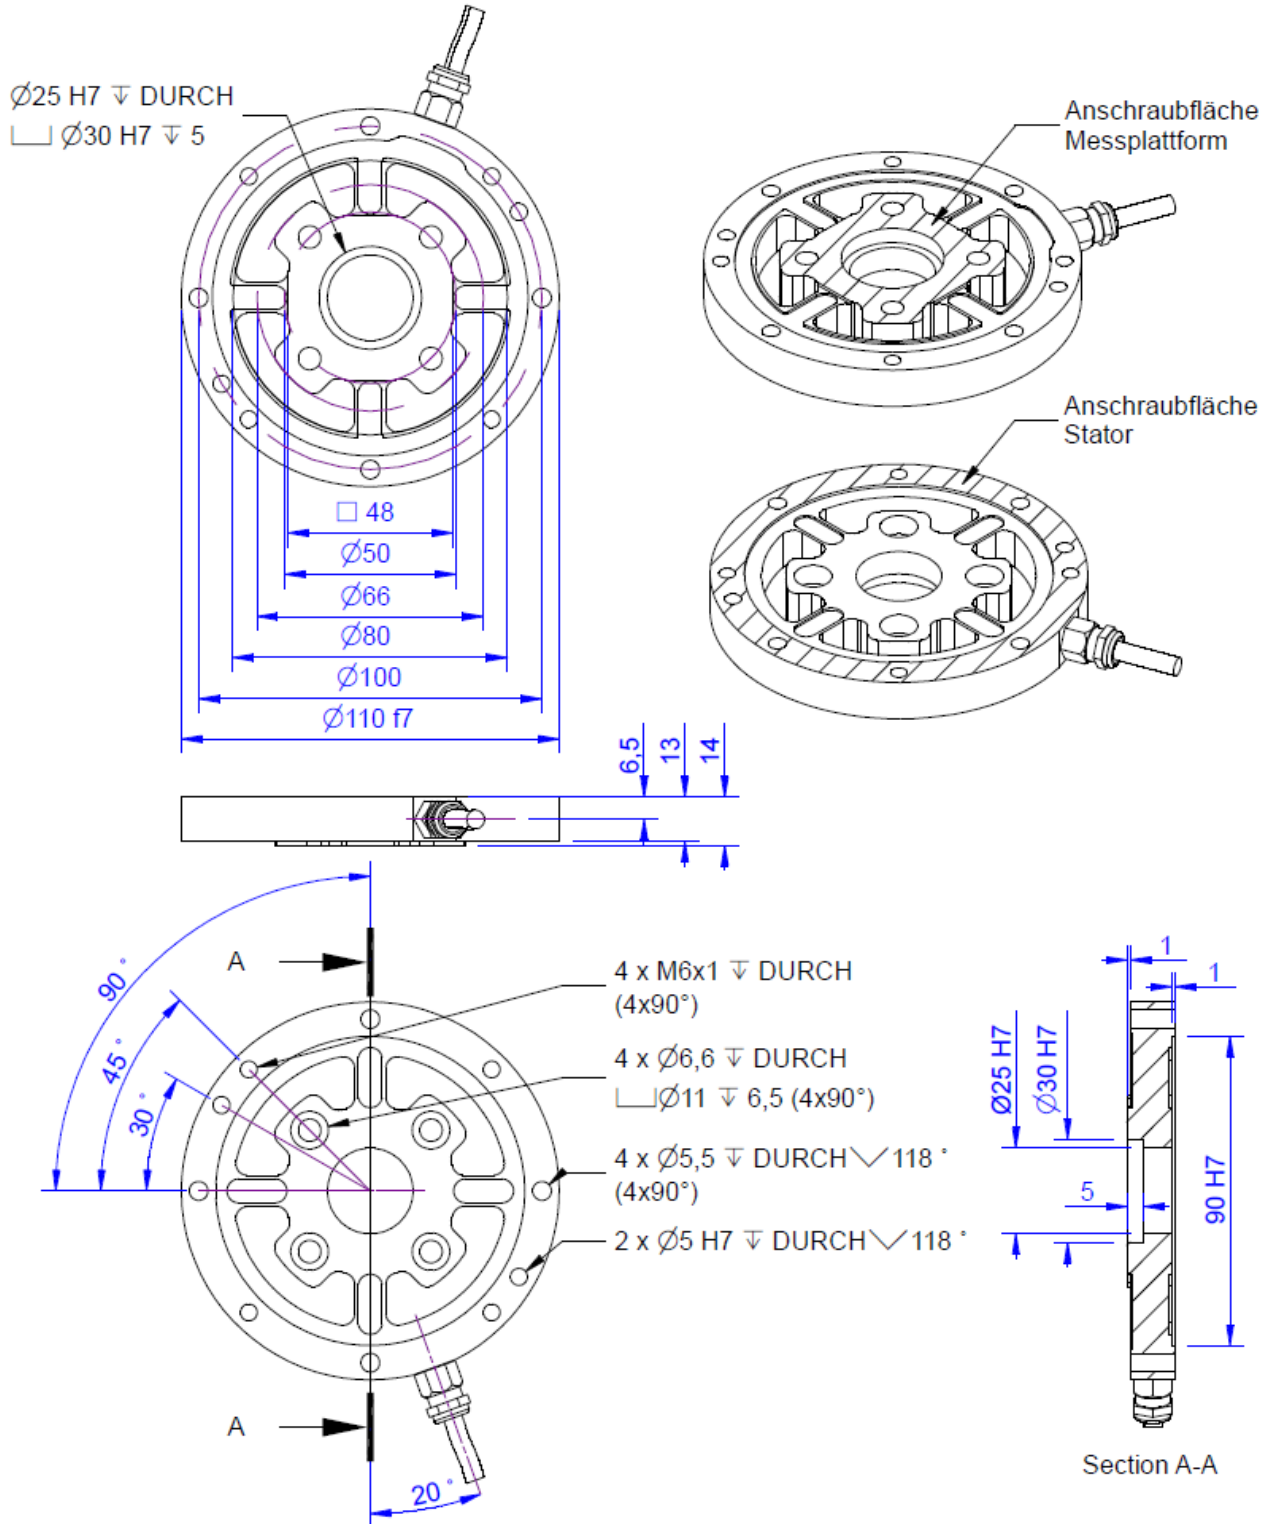

Technical Data

Basis Data

Type	shear beam
Bending moment limit	20 Nm
Maximum operating torque	150 %FS
Breaking torque	400 %FS
Rated torsion angle	0.7 °/FS
Axial force limit	1000 N
Lateral force limit	1000 N
Torque introduction	pitch circle
Dimension 1	Ø50
drehmomentausleitung	pitch circle
Dimension 2	Ø100
Diameter	110 mm
length	14 mm

Electrical Data

Input resistance	2000 Ohm
Tolerance input resistance	10 ±
Output resistance	2000 Ohm
Tolerance output resistance	10 ±
Insulation resistance	5x10 ⁹ Ohm
Rated range of excitation voltage f	2.5 ... 5 V
Operating range of excitation voltage f	1 ... 10 V
Zero signal	0.05 mV/V
Rated output	1 mV/V / FS

Precision

Accuracy class	0.1
Relative linearity error	0.1 %FS
Relative zero signal hysteresis	0.1 %FS
Temperature effect on zero signal	0.01 %FS/K
Temperature effect on characteristic value	0.01 %RD/K
Relative creep	0.05 %FS

Connection Data

Connection type	4 conductor open
Name of the connection	Unitronic FD CP Plus / 4x0,14
Cable length	3 m

Temperature

Rated temperature range f	-10 ... 60 °C
Operating temperature range f	-10 ... 85 °C
Storage temperature range f	-10 ... 85 °C
Environmental protection	IP65



Abbreviation: RD: „Reading“; FS: „Full Scale“;

1) The exact nominal sensitivity is indicated in the test report;







Pin Configuration

Symbol	Description	Wire colour
+Us	positive bridge supply	brown
-Us	negative bridge supply	white
+Ud	positive bridge output	green
-Ud	negative bridge output	yellow

Pressure load: positive output signal.

Shield: transparent.

accessories

Description	Description
 Factory calibration certificate Nm/50/5	Detection of the characteristic value and the traceability to DKD torque device
 Factory calibration certificate Nm/50/5/System	Proof of the characteristic value and the traceability on DAkKS torque device, including system calibration
 Factory calibration certificate Nm/200/5	Detection of the characteristic value and the traceability to DKD torque device
 Factory calibration certificate Nm/200/5/System	