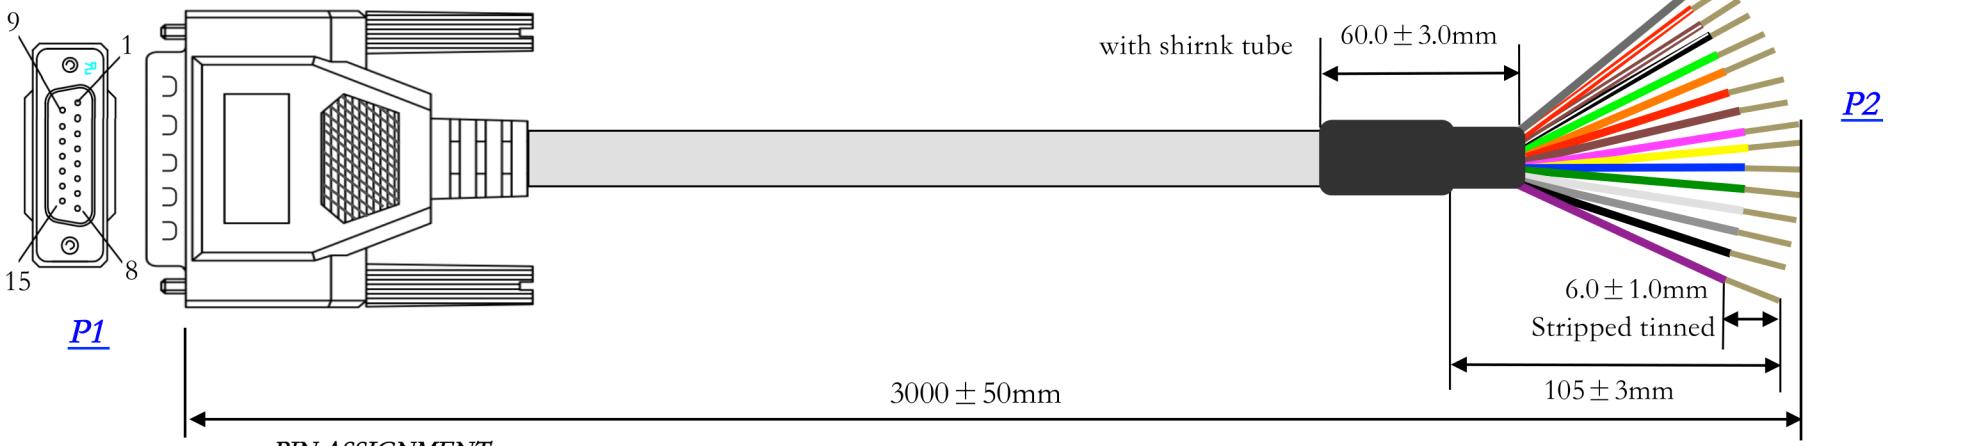


PIN ASSIGNMENT

P1 DB15P	Color code	P2
1	Blakc	Tinned
2	Brown	Tinned
3	Red	Tinned
4	Orange	Tinned
5	Yellow	Tinned
6	Green	Tinned
7	Blue	Tinned
8	Purple	Tinned
9	Gray	Tinned
10	White	Tinned
11	Pink	Tinned
12	Light Green	Tinned
13	Black/white	Tinned
14	Brown/white	Tinned
15	Red/white	Tinned
Shell	Drain wire	Tinned

Note:

1. Cable: 28awg*15C + Drain wire+AL-Foil+PVC, Beige color Pvc Jacket, OD:7.0mm
2. Connector: P1 D-sub 15Pin Male. Solder Type. Blue PBT insulation, Gold Flash Coneacts
3. Thumb screw to be molded beige color #4-40 UNC*4Pcs 2.3*47mm
4. The inner molded material: clear LD-PE
5. P1 outter Molded Beige PVC 45P
6. Testing: 100% electrical test at 5M Ohm Insulation Resistance.300V DC.
7. Packing: Each cable&Packaged Poly-bag.

Revicions			
Date	Description	DRN	Rev
2014.12.10	Drawing Issued		A

Tolerance			
mm	0.30	0.10	0.05
Inches	0.015	0.010	0.005
	.X	.XX	.XXX

DRAW BY:	SPEC: D-SUB 15P Male to strip tinned 3M	
CHECK BY:		
APPROVED BY:	CUSTOMER P/N: 2-8327	REV.
		A
DATE:10.12.2014	DRAWING NO: R141202A	1/1
UNIT: MM		